


<b>Specifications*</b>		
<b>Technical Data</b>	<b>Metric</b>	<b>Standard</b>
Impact weight (Piston) approx.	28,000 kg	61,729 lbs.
Energy per blow (adjustable)	933 - 485 kNm	688,145 - 357,717 lbs.ft.
Number of blows	36-50 Blow/min	36-50 Blow/min
Batter piling forward & backward up to	1 : 3	1 : 3
Diesel oil consumption	80 l/h	21 gal./h
Lube oil consumption	5.8 l/h	1.53 gal./h
<b>Capacities</b>		
Diesel oil tank	460 l	121 gal.
Lube oil tank	100 l	26 gal.
<b>Approx. Weights</b>		
Approx weight of Hammer	51,000 kg	112,435 lbs.
Approx weight of tripping device	1,950 kg	4,300 lbs.
Tool box approx.	200 kg	441 lbs.
<b>Dimensions</b>		
<b>a</b> - Length	832 cm	27.3 ft.
<b>B</b> - Outer diameter of impact block	120 cm	3.9 ft.
<b>C</b> - Width of Diesel Pile Hammer	135 cm	4.4 ft.
<b>C</b> - Width for connection of guide jaws	110 cm	3.6 ft.
<b>D</b> - Center of Diesel Pile Hammer up to pump guard	70 cm	2.3 ft.
<b>E</b> - Center of Diesel Pile Hammer up to center of threaded hole for fastening screws of the guide jaws	46 cm / 56 cm	1.5 ft. / 1.8 ft.
<b>F</b> - Center of Diesel Pile Hammer up to the tripping device	76.2 cm	2.5 ft.
<b>G</b> - Depth of Diesel Pile Hammer	168 cm	5.5 ft.

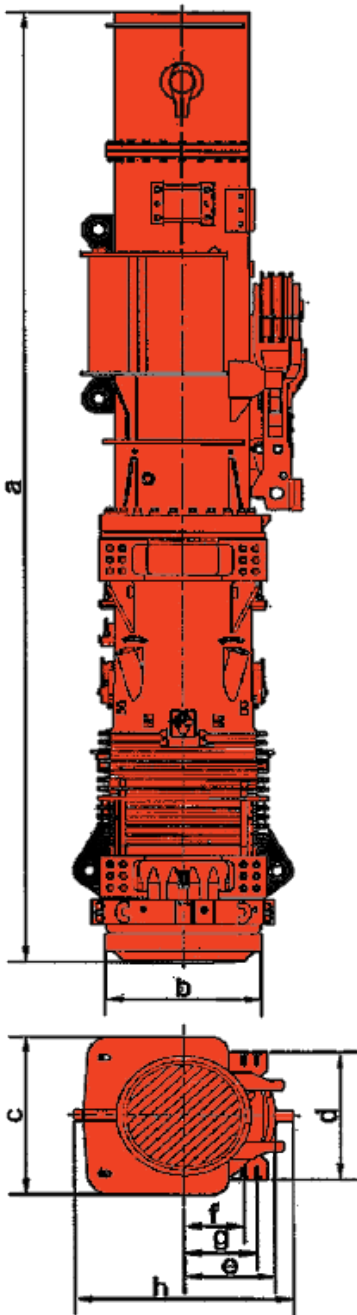

\*Technical data are subject to change without prior notice