



E 9080

SP300

S O I L D I S P L A C E M E N T K I T




ENTECO
EXPERIENCE AND INNOVATION

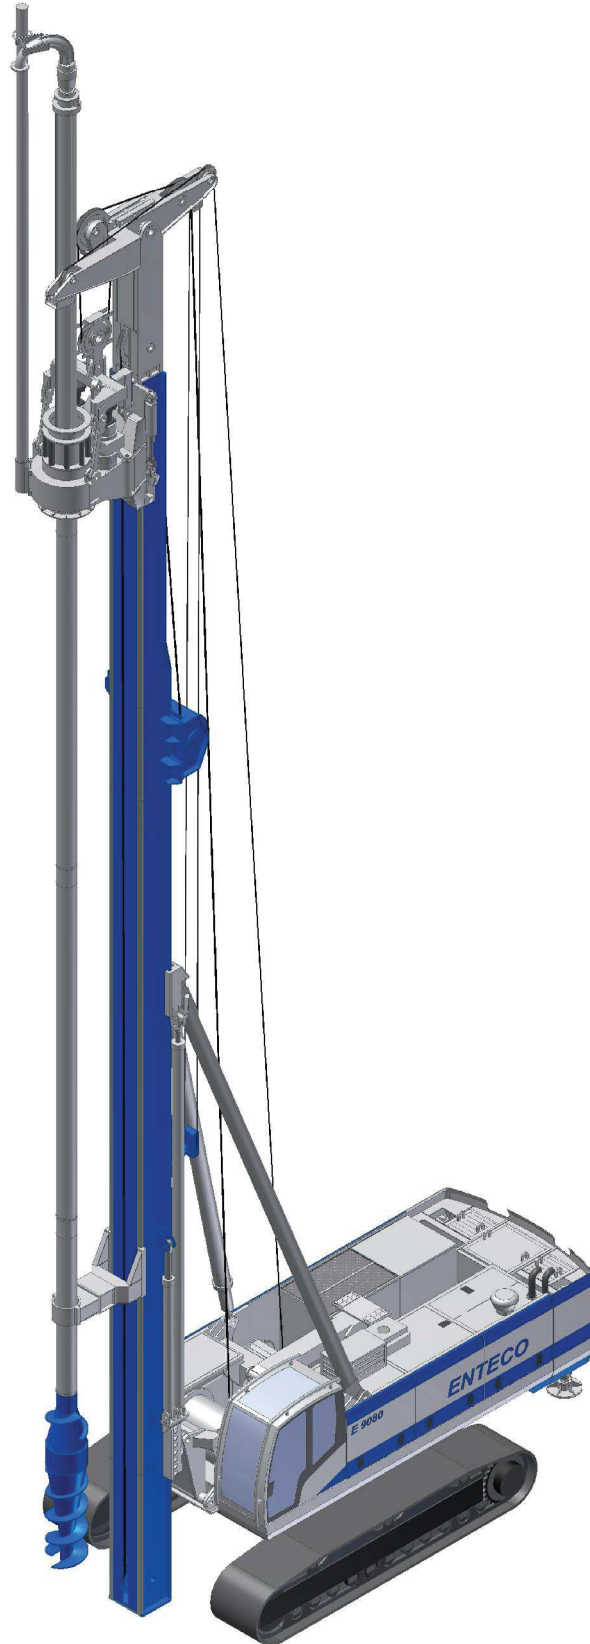

E 9080

SP300

S O I L D I S P L A C E M E N T K I T

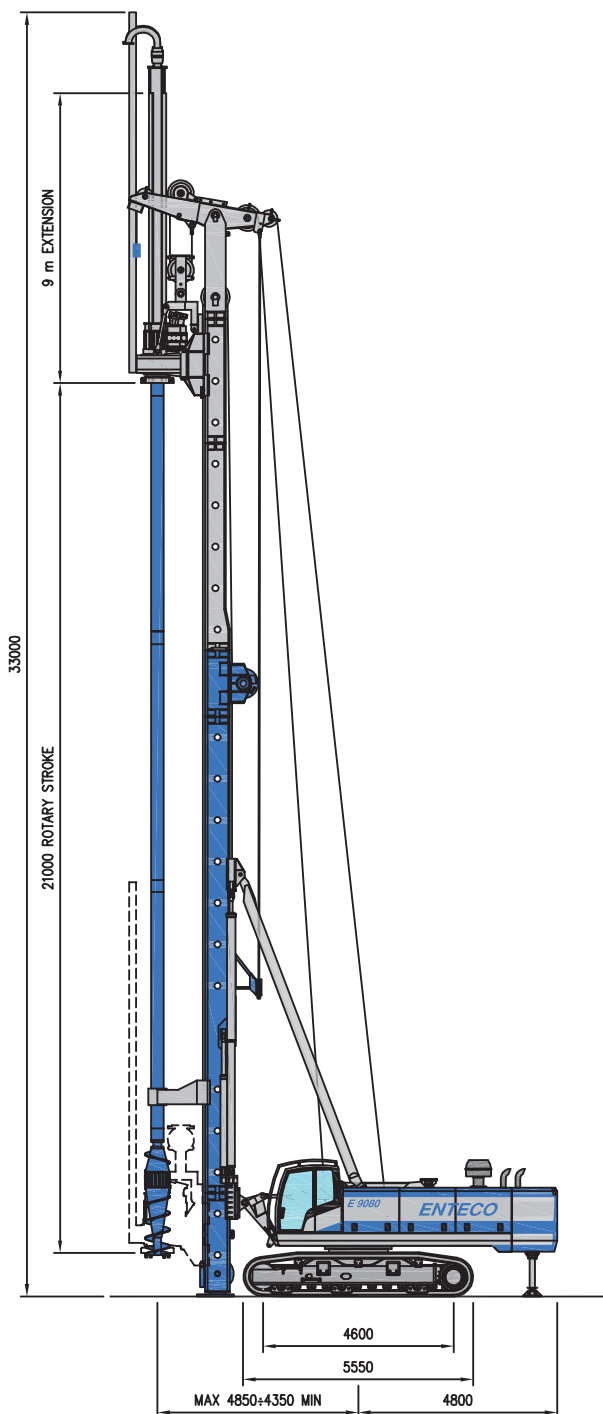

E 9080 - SP300 SOIL DISPLACEMENT KIT

OPERATING WEIGHT	ton	up to 90
Drilling diameter	mm	320+800
Max drilling depth	m	35
MAST		
Mast vertical travel	mm	2000
CROWD SYSTEM		
Rotary stroke	mm	21000
Crowd force	kN	330
Extraction force	kN	870
ROTARY		
Model		ENTECO RH51/2
Max torque	kNm	320
Max drilling speed	rpm	33
Kelly extension	m	6, 9, 12, 15

E 9080 - BASE MACHINE

CRAWLERS			
Overall width	mm	3000+4500	
Track pads	mm	900	
Crawler drive speed	km/h	1.8	
DIESEL ENGINE			
Model	CATERPILLAR	C13 ACERT	C15 ACERT
Max power	HP/kW	440/328	540/403
Fuel tank capacity	litres	750	
MAIN WINCH			
Max line-pull 1st layer	kN	270	
Free-fall device		option	
AUXILIARY WINCH			
Max line-pull 1st layer	kN	150	
Free-fall device		option	

