




U-Type Leads

BAUER-Pileco lead systems show following features:

- The U26 to U48 leads utilize our proven pin connectors for quick field assembly (U21 leads are bolt connected as standard, pin connected available)
- All lead sections are interchangeable in order to permit various length combinations
- The lead can be furnished with side mounted auger tracks for installation of cont. flight auger drills

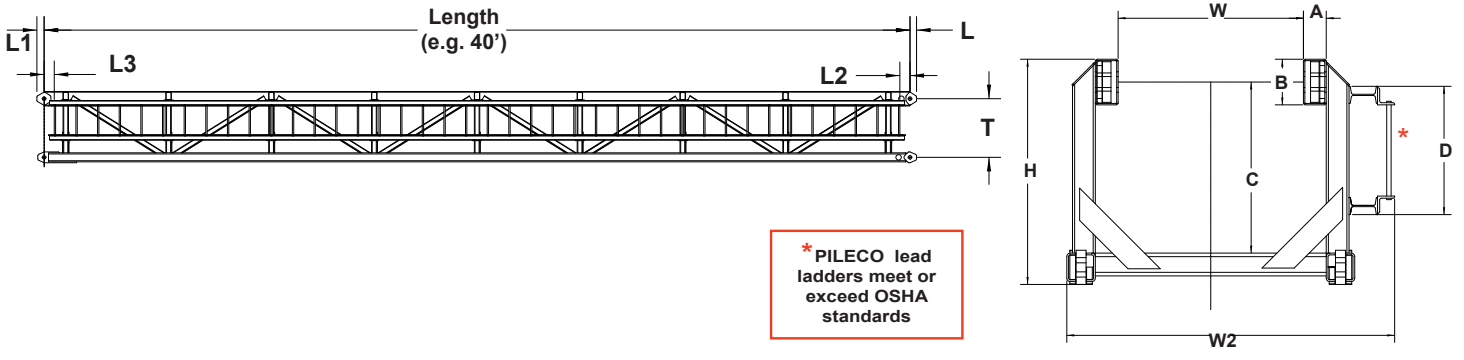

Bolt Style	L	L1	L2	L3	W	W2	T	C	H	D	A	B	Weight/ lbs. per ft.	Hammer
U-21	0.5"	0.5"	4.9"	4.9"	21.5"	45.0"	30.8"	27"	35"	22.5"	4"	8"	105	D19-42
Pin Style														
U-26	3.6"	4"	5.6"	5.6"	26.5"	51.5"	32.5"	30"	39"	22.5"	4"	8"	140	D30-32
U-32	3.6"	4"	5.6"	5.6"	32.5"	58.0"	32.5"	30"	39"	22.5"	4"	8"	150	D62-32
U-42	3.6"	4"	5.6"	5.6"	42.5"	68.5"	45.5"	34"	52"	22.5"	4"	8"	200	D138-32
U-48	3.6"	4"	5.6"	5.6"	48.5"	74.5"	51.5"	37"	58"	22.5"	4"	8"	225	D180-32

Head blocks for fixed lead systems

	Pile lines guided over fairleads (the shown dwg# can be modified to all lead sizes)				Manual Pile gates pinned on to lead connector				
	Pileco dwg.#	20367	20320		dwg.#	25029	25028	25027	30157
	Hammer line	x	x		Size	Sq. 30"/U48	Sq. 30"/U42	Sq. 30"/U42	Ø24 / U32
	1. Pile line	x	x		Weight	1900	1300	1300	n.a.
	2. Pile line	x							Offset 24"
Auger line				Various centralizers (closed profile) for square and round piles are available in offset or central lead axis					
	Pile lines guided over rollers in fixed position (the shown dwg# can be modified to all lead sizes)				Hydraulic Pile gates bolt on to lead rails				
	Pileco dwg.#	10007	20090		20288	dwg.#	30124	30131	
	Hammer line	x	x		x	Size	HP10, 12, 14 U26	HP10, 12, 14 U26	
	1. Pile line	x	x		x	Weight	n.a	n.a	
	2. Pile line		x		x	Various pile gate arms are available to adapt pile sizes and shapes. Roller equipped arms available for coated piles.			
Auger line			x						



BAUER-Pileco Inc.
 111 Berry Road, Houston, TX 77002
 Ph.: (713) 691-3000
 Fax: (713) 691-0089
 E-mail: info@bauerpileco.com
 www.bauerpileco.com