


E 9080

DTH300



L A R G E D I A D T H K I T

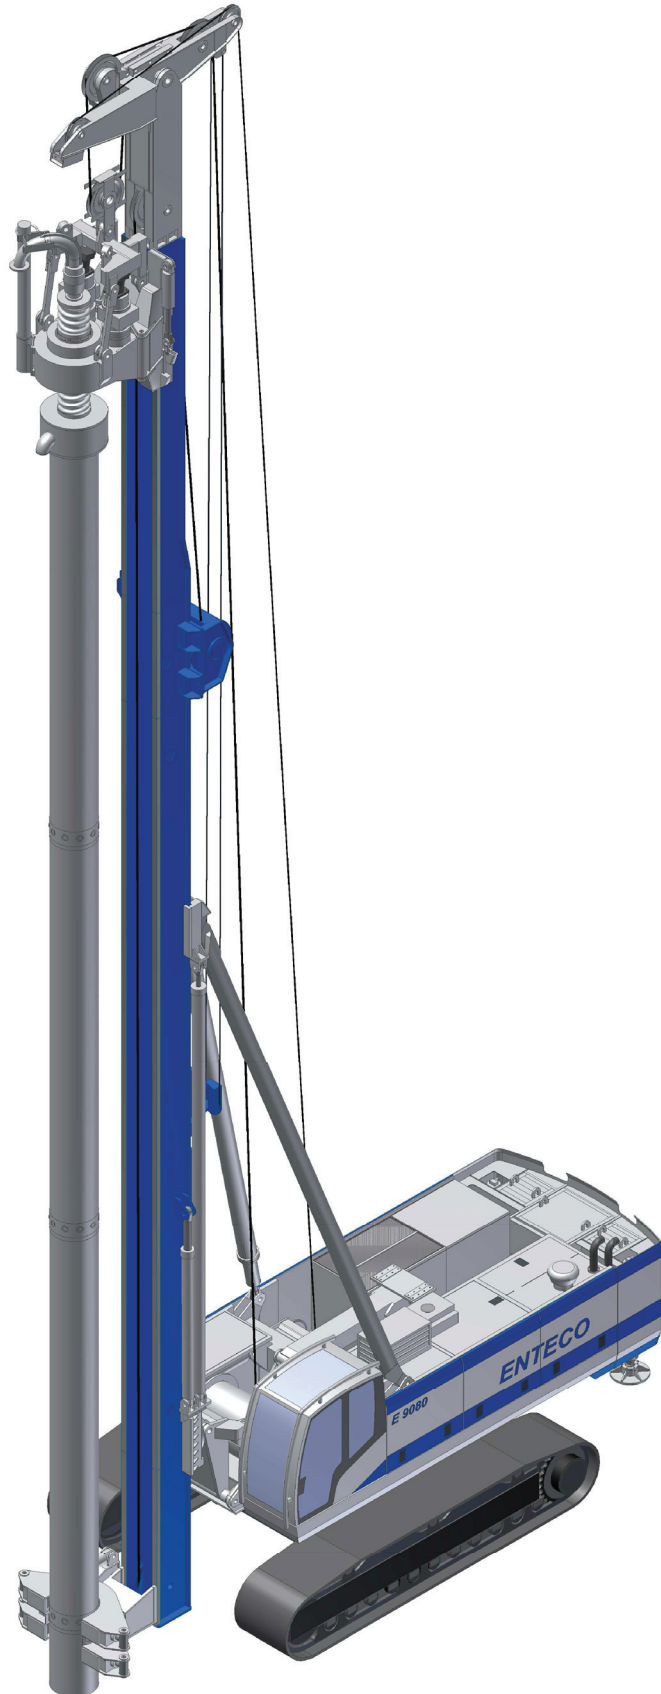

E 9080

DTH300

L A R G E D I A D T H K I T

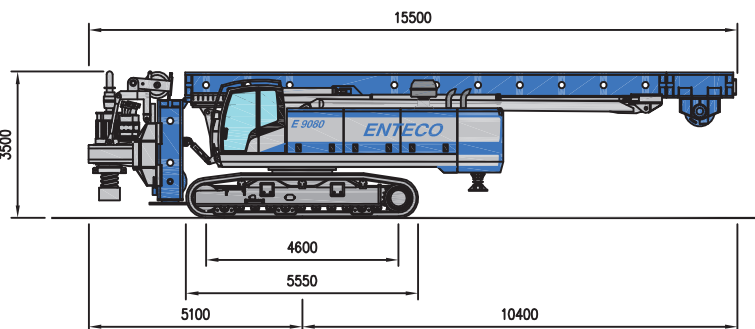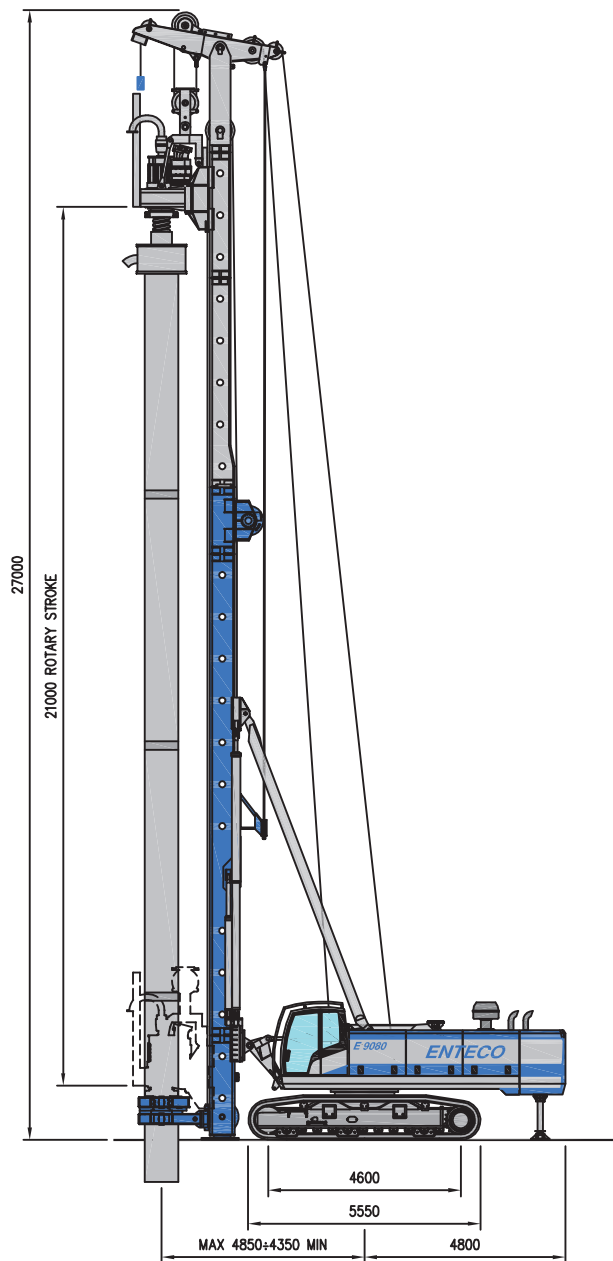

E 9080 - DTH300 LARGE DIA DHT KIT

| | | |
|--------------------|-----|----------|
| OPERATING WEIGHT | ton | up to 94 |
| Drilling diameter | mm | 400÷1200 |
| Max drilling depth | m | 21 |

MAST

| | | |
|----------------------|----|------|
| Mast vertical travel | mm | 2000 |
|----------------------|----|------|

CROWD SYSTEM

WINCH

| | | |
|------------------|----|-------|
| Rotary stroke | mm | 21000 |
| Crowd force | kN | 330 |
| Extraction force | kN | 870 |

ROTARY

| | | |
|--------------------|-----|---------------|
| Model | | ENTECO RH51/2 |
| Max torque | kNm | 320 |
| Max drilling speed | rpm | 33 |

E 9080 - BASE MACHINE

CRAWLERS

| | | |
|----------------|------|-----------|
| Overall width | mm | 3000÷4500 |
| Track pads | mm | 900 |
| Tramming speed | km/h | 1.8 |

DIESEL ENGINE

| | | | |
|--------------------|-------------|-----------|-----------|
| Model | CATERPILLAR | C13 ACERT | C15 ACERT |
| Rated power | HP/kW | 440/328 | 540/403 |
| Fuel tank capacity | litres | 750 | |

MAIN WINCH

| | | |
|-------------------------|----|--------|
| Max line-pull 1st layer | kN | 270 |
| Free-fall device | | option |

AUXILIARY WINCH

| | | |
|-------------------------|----|--------|
| Max line-pull 1st layer | kN | 150 |
| Free-fall device | | option |



Via dell'Artigianato, 33 - Z.I. - 30020 Fossalta di Piave - VENEZIA - ITALIA

Tel +39 0421 67.99.77 - Fax +39 0421 67.99.93 - e-mail: info@entecodrill.com - www.entecodrill.com