


# E 6050

## HGT30

### DIAPHRAGM WALL KIT

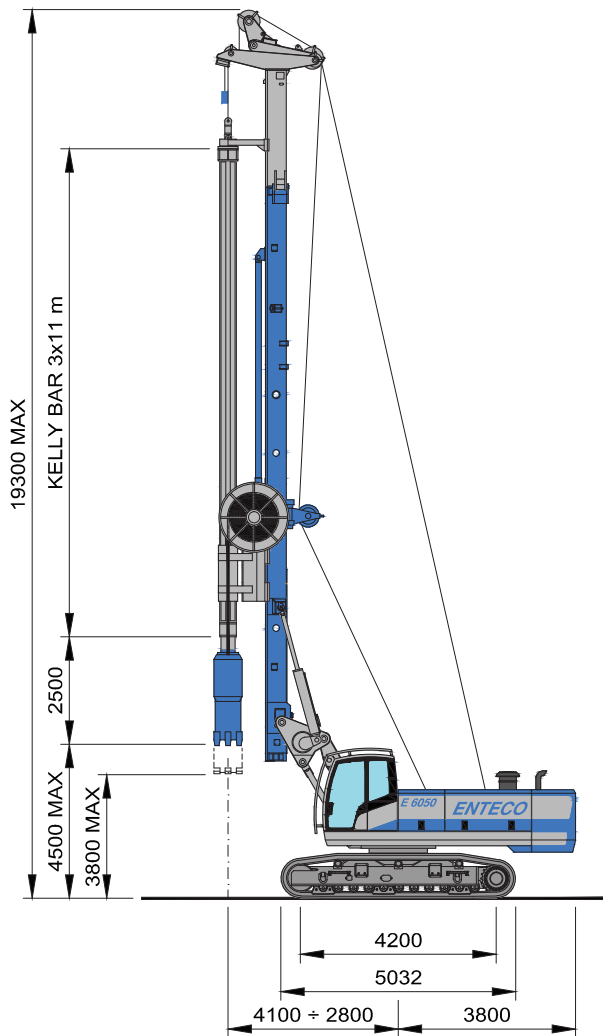

#### E 6050 - HGT30 DIAPHRAGM WALL KIT

OPERATING WEIGHT ton up to 56

Max depth m 30

#### HYDRAULIC GRAB

Model ENTECO HG3

Width of trench mm 300÷1200

Length of trench mm 2000-2500

#### TELESCOPIC KELLY

Type - elements/length 3x11

Max depth m 30

Interlocking 1st element option

Kelly rotation ±45°

#### E 6050 - BASE MACHINE

CRAWLERS STANDARD OPTION

Overall width mm 3000+4200 2550+3950

Track pads mm 700 650

Crawler drive speed km/h 2.1 2.1

#### DIESEL ENGINE

Model CATERPILLAR C9 ACERT

Rated power HP/KW 350/261

Fuel tank capacity litres 400

#### MAIN WINCH


Max line-pull 1st layer kN 165

Free-fall device installed

AUXILIARY WINCH STANDARD OPTION

Max line-pull 1st layer kN 50 70

Free-fall device option option

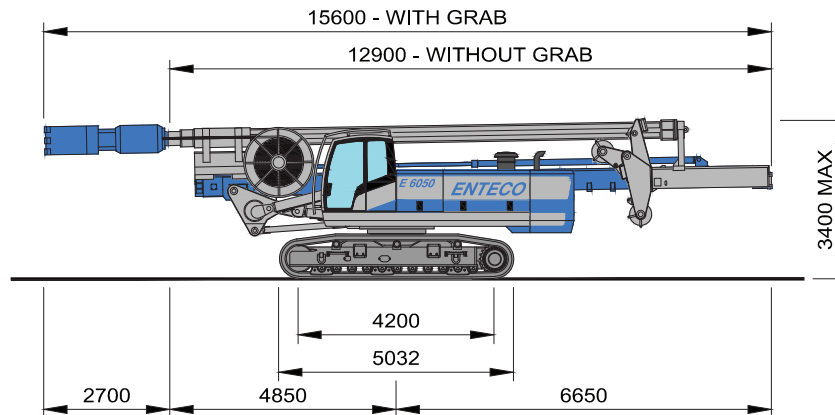

Via dell'Artigianato, 33 - Z.I. - 30020 Fossalta di Piave - VENEZIA - ITALIA  
Tel +39 0421 67.99.77 - Fax +39 0421 67.99.93 - e-mail: info@entecodrill.com - www.entecodrill.com